



STANDARD DETAILS

CITY OF SHEPWOOD  
ARKANSAS


TITLE

CURB & GUTTER SECTIONS  
ARTERIAL STREETS

Issue Date  
January, 2007


STD-28  
Revision Date

### UPRIGHT CLASS 1

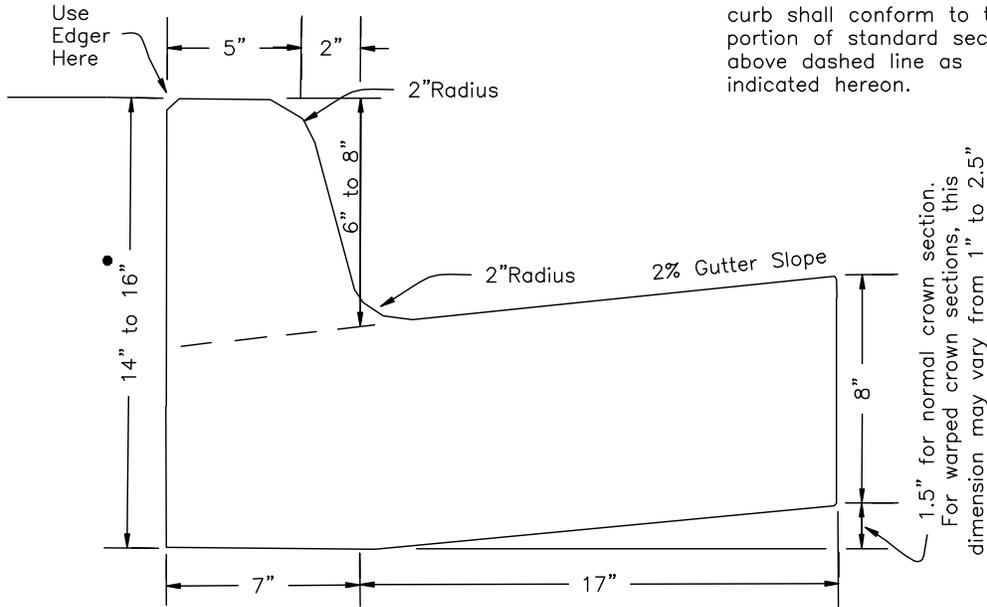

Standard section for integral curb shall conform to that portion of standard section above dashed line as indicated hereon.

### ROLL CLASS 2

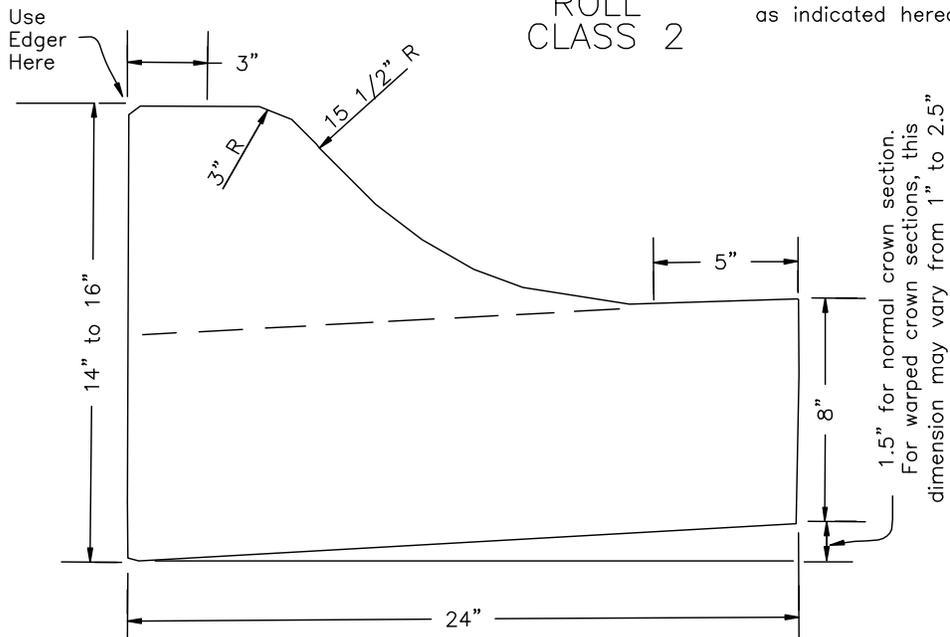

Standard section for integral curb shall conform to that portion of standard section above dashed line as indicated hereon.

Install 1/2" Bituminous Expansion Joint Material  
At 100' Max. Intervals Or At Tie Ins To Boxes,  
Radius Returns Or Driveway Aprons. Control Joints  
15' Max. O.C.

Joint Sealant Shall be Sonneborn SL2 Self Leveling Urethane  
as Manufactured by Chemrex or Equivalent.