



STANDARD DETAILS

CITY OF SHERWOOD  
ARKANSAS

TITLE

TEMPORARY EROSION  
CONTROL DEVICES

STD-63



Issue Date

January, 2007


Revision Date

GENERAL NOTES


- STRAW BALES SHALL BE INSTALLED SO BINDINGS ARE ORIENTED AROUND SIDES RATHER THAN ALONG TOPS AND BOTTOMS OF BALES. BALES SHALL BE A MINIMUM OF 30" IN LENGTH.
- STRAW BALES SHALL BE KEYED INTO SOIL A MINUM OF 4" AND NO CAPS SHALL BE LEFT BETWEEN BALES.

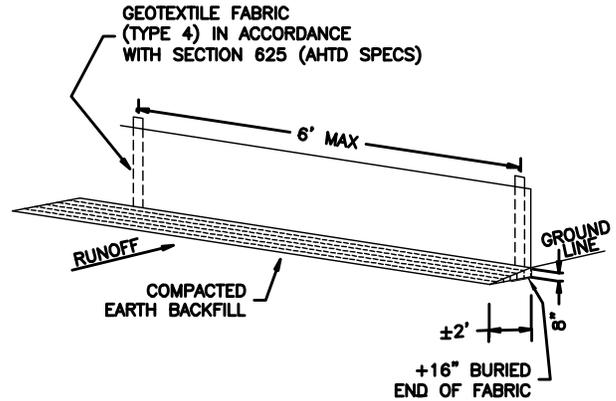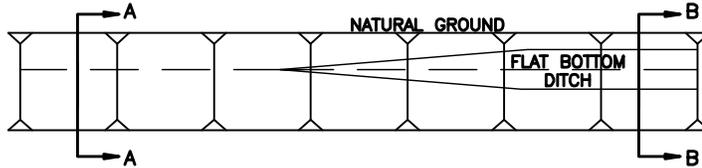


SILT FENCE (E-11)

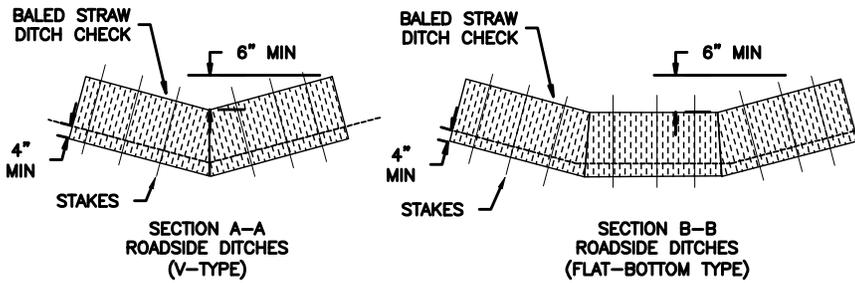


BALED STRAW DITCH CHECK (E-1)

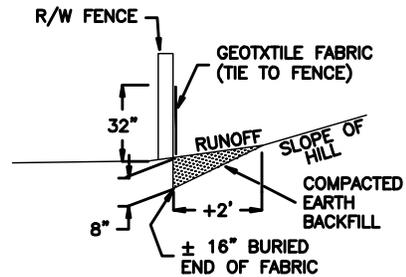


SILT FENCE ON R/W FENCE (E-4)

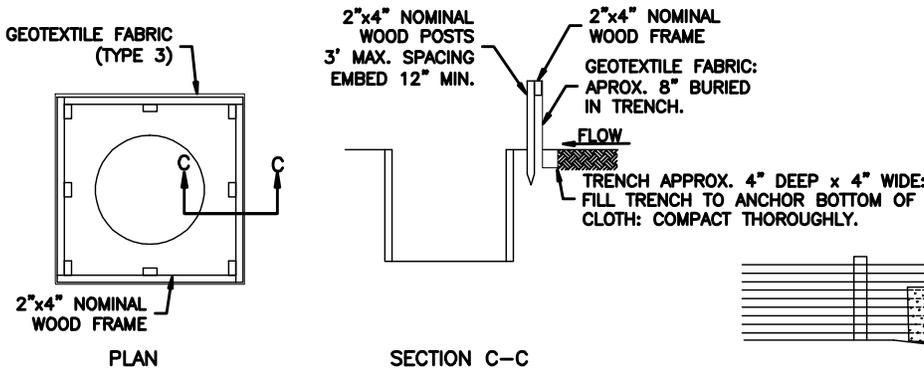


DROP INLET SILT FENCE (E-7)

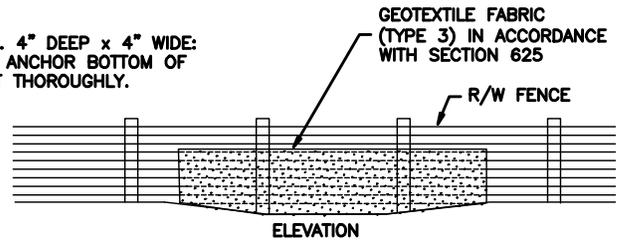

NUMBER OF SAND BAGS AND ARRANGEMENT VARIABLE WITH ON-SITE CONDITIONS.

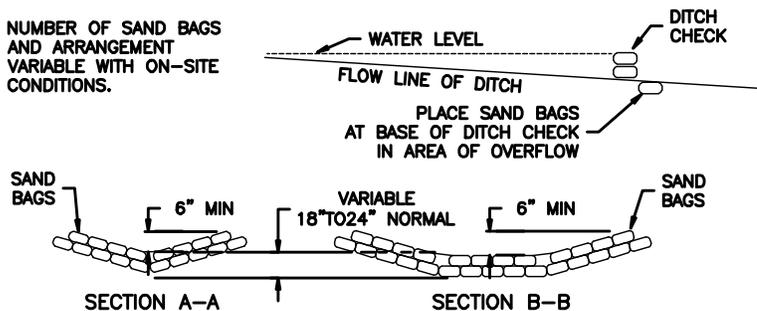

SAND BAG DITCH CHECK (E-5)

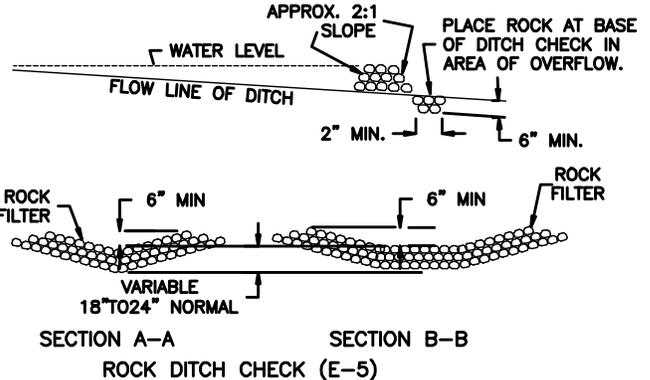

ROCK DITCH CHECK (E-5)