STANDARD DETAILS CITY OF SHERWOOD ARKANSAS	TITLE CHAIN LINK FENCE DETAIL RESIDENTIAL SHEET 2 OF 2		STD-55-2
		Issue Date January, 2007	Revision Date

HEIGHT OF FENCE FABRIC	A	B		C		D		E		F				G	
	END, PULL, CORNER OR BRACE POST	LINE POST		TOP RAIL		TENSION WIRE		TENSION BAR		TENSION BAR BAND				BRACE BAND	
		SIZE	TIE SPACING	SIZE	TIE SPACING	MIN. LENGTH	SIZE	TIE SPACING	SIZE	LENGTH	SIZE	BOLT SIZE	SPACING	SIZE	BOLT SIZE
6' AND LESS	2 1/2" O.D. OR 3 1/2" X 3 1/2" R.F.	2" O.D. OR H-2.72#	1 TIE EVERY 1'-2" OF FABRIC HEIGHT	1 5/8" O.D.	1 TIE EVERY 2'-0"	10'-0"	12 GUAGE COIL SPRING WIRE	1 TIE EVERY 18"	MIN OF 3/16" X 3/4"	MIN OF 2" LESS THAN FABRIC HEIGHT	MIN OF 3/4" X 0.074	5/16" X 1 1/4"	1 BAND AT TOP & BOTTOM 15" MAX. INTERVAL BETWEEN BANDS	MIN OF 3/4" X 0.0105	5/16" X 1 1/4"

HEIGHT OF FENCE FABRIC	H	I	J		K	L			M		N		O	T
	TIE WIRE	HOG RING	BRACE RAIL		TRUSS ROD	FABRIC			GATE FRAME		HORIZONTAL SUPPORT		HINGE TYPE	GATE POST
			SIZE	TIE SPACING		SIZE	MESH	SELVAGE	SIZE	TIE SPACING	SIZE	TIE SPACING	180° SWING	GATE WIDTH 12' AND LESS
6' AND LESS	MIN. OF 12 GA. STEEL OR 9 GA. ALUM.	SAME GAUGE AS FABRIC	1 5/8" O.D.	1 TIE EVERY 2'-0	MIN. OF 5/16" ROUND WITH TIGHTNERS AND FITTINGS	11 GAUGE	2"	KNUCKLING AND/OR TWISTING	1 5/8" O.D.	1 TIE EVERY 1'-0"	1 5/8" O.D.	1 TIE EVERY 1'-0"	OFFSET	2 1/2" O.D. OR 3" X 3" R.F.
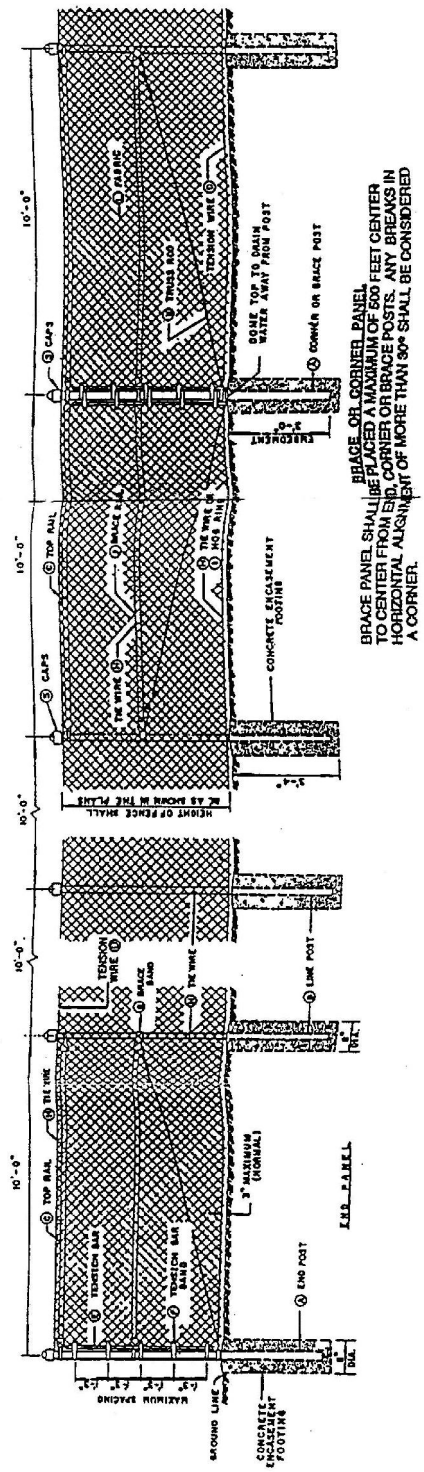
POST SPACING DETAIL